

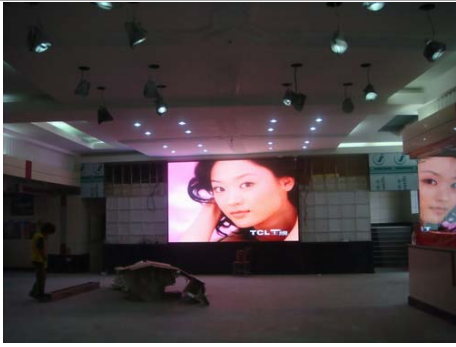


Indoor full color led display

ITEM	P4 indoor full color led display	P5 indoor full color led display	P6 indoor full color led display
Picture			
LED screen size	To be customized	To be customized	To be customized
Resolution(total pixel)	It will depend on LED screen size	It will depend on LED screen size	It will depend on LED screen size
Cabinet dimension	It will depend on LED screen size	It will depend on LED screen size	It will depend on LED screen size
Installation type	Fixed installation type or Rental type	Fixed installation type or Rental type	Fixed installation type or Rental type
Note: We shall work out the best solution with quotation and specification according to buyer' requirement of LED screen size and application			

Specifications:

Pitch size	4mm	5mm	6mm
Pixel configuration	1Red,1Green,1Blue,SMD2020	1Red,1Green,1Blue,SMD3528	1Red,1Green,1Blue,SMD3528
Color scale	260000grade/1.07 billion colors	260000grade/1.07 billion colors	260000grade/1.07 billion colors
Pixel density	62500pixels/m ²	40000pixels/m ²	27777pixels/m ²

LED module size	128*128cm	160*160cm	192*96cm
Module resolution	32*32pixels	32*32pixels	32*16pixels
Cabinet material	Steel	Steel	Steel
View angle(H/V)	120/120 degree	120/120 degree	120/120 degree
Brightness	≥1200cd/ m ²	≥1200cd/ m ²	≥1200cd/ m ²
View distance	2-200m	2-200m	3-200m
Power consumption	50-1800W/m ²	50-1500W/m ²	50-1200W/m ²
Net weight	35kg/m ²	35kg/m ²	35kg/m ²
Operating temperature	—25℃~+60℃	—25℃~+60℃	—25℃~+60℃
Operating humidity	10%—95%RH	10%—95%RH	10%—95%RH
Life time	100,000hours	100,000hours	100,000hours
MTBF	10,000hours	10,000hours	10,000hours
Frame speed	>150frames per second	>150frames per second	>150frames per second
Refresh frequency	600Hz	600Hz	600Hz
Control distance	100m (without relay),multi-mode fiber: 500m,single-mode fiber:20000m	100m (without relay),multi-mode fiber: 500m,single-mode fiber:20000m	100m (without relay),multi-mode fiber:500m,single-mode fiber:20000m
Power	110/220V±15% 50Hz	110/220V±15% 50Hz	110/220V±15% 50Hz
operating system	Windows98/Me/2000/Xp	Windows98/Me/2000/Xp	Windows98/Me/2000/Xp
display mode	VGA640X480—VGA1600X1024	VGA640X480—VGA1600X1024	VGA640X480—VGA1600X1024

Packing:

Our standard packing is plywood case like following picture:



We have another packing for option(need to charge the cost), that is ,flight case like following picture:

